




Panober® bonded panels

Prestige d'Oberflex, Textured Wood Collection, and other Oberflex wood collections...

Composition :

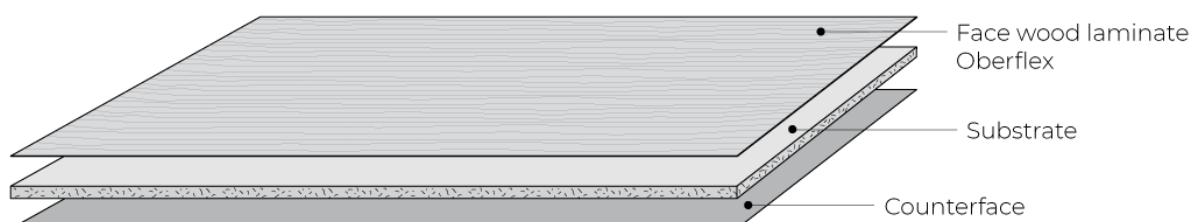

Available substrate :

- Particule board 16 mm or 19 mm, standard E1
- MDF 16 mm ou 19 mm, standard E1
- Other on demand

Dimensions (raw edges) :

- Particule board : 3040 x 1230 mm • 2500 x 1230 mm (except black or white Oak references - Textured wood collection : 3000 x 1210 mm ou 2500 x 1210 mm)
- MDF : 3040 x 1200 mm • 2500 x 1200 mm (except black or white Oak references - Textured wood collection : 3000 x 1200 mm ou 2500 x 1200 mm)
- Other dimensions : custom sized as per elevation drawings and cutting list.

Thicknesses :

- 16mm substrate : total thickness = 17,6 to 18,6 mm
- 19mm substrate : total thickness = 20,6 to 21,6 mm

Balancing :

- A/A : face 1st choice / counterface 1st choice
- A/C : face 1er choice / counterface second grade wood veneer
- A/P : face 1er choice / counterface white décor

Fire ratings :

- on MDF : M2
- on particule board : M2
- Other on demand : Euroclass Bs1d0 or M1

Custom options :

- Custom-sized
- Veneered edges
- Millings (grooves, miter edges,...)
- Matched patterns

Complementary products :

- Edge bandings
- Profile for installation

General information :


For a same order, it is possible to order Oberflex wood laminates that match the Panober panels (same species, same finish, same format) while stocks last.



Panober® bonded panels

Pure Paper Color

Composition :

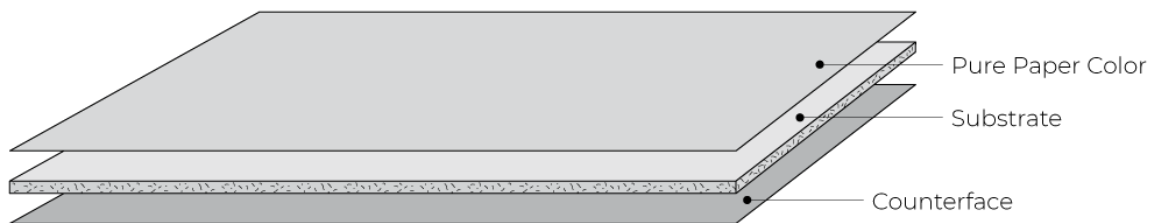

Available substrates :

- Particule board 16 mm or 19 mm, standard E1
- MDF 16 mm ou 19 mm, standard E1
- Other on demand

Dimensions (raw edges) :

- 3040 x 1230 mm - The panels are supplied in oversize and not trimmed to facilitate the patterns matching during application.

Thicknesses :

- 16 mm substrate : Total thickness = 17,8 mm (17,6 mm for Skin et Figured)
- 19 mm substrate : Total thickness = 20,8 mm (20,6 mm for Skin et Figured)

Balancing :

- A/A : face 1st choice / counterface 1st choice
- A/C : face 1er choice / counterface second grade

Fire ratings :


- M2
- Other upon request : IMO, Euroclass Bs1d0 ou M1



Panober® bonded panels

Pure Paper Metal

Composition :

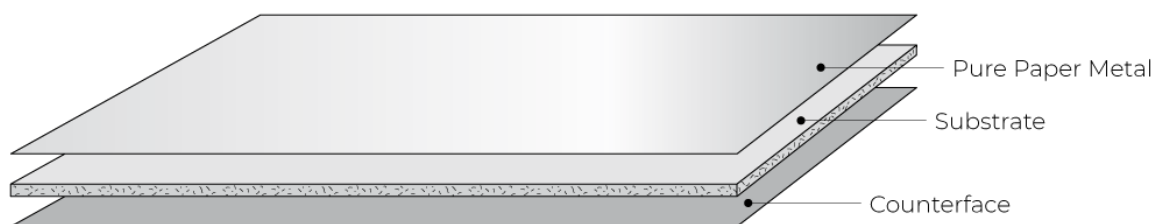

Available substrate :

- Particule board 16 mm or 19 mm, standard E1
- MDF 16 mm ou 19 mm, standard E1
- Other on demand

Dimensions (raw edges) :

- Brushed : 3040 x 1230 mm
- Mill finish et Glossy : 3040 x 1210 mm

Panels are supplied in oversize to facilitate the patterns matching during application.

Thicknesses :

- Brushed : 17.8 mm
- Mill finish et Glossy : 18.2 mm

Balancing :

- A/A : face 1st choice / counterface 1st choice
- A/C : face 1er choice / counterface second grade

Fire ratings :

- M2
- Other upon request : Euroclase Bs1d0 ou M1