




Marotte collection  
**Sylvaflex® flexible panel**

Thin and flexible panel. Sylvaflex® must be bonded on a support panel (plywood, MDF, particleboard...) or on already manufactured joinery elements (doors, counters, furniture, columns, ...). Once bonded, Sylvaflex must be covered with a finishing coat of varnish or oil.

**Composition :**

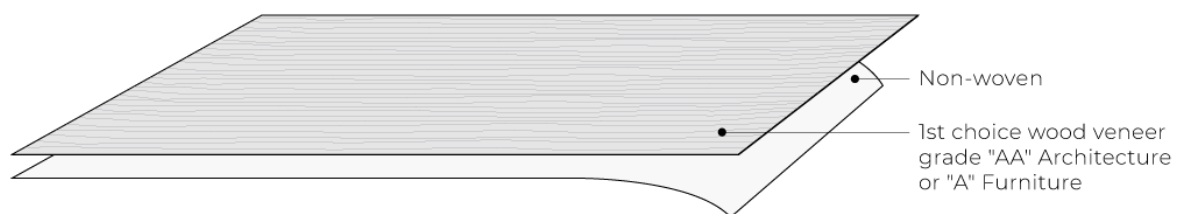

**Description :** Sylvaflex flexible panels are available in all Marotte's fine wood species

**Face :** First choice wood veneer grade "A"(furniture) or "AA" (Architecture)

**Backer :** Non-woven

**Finish :** Supplied unfinished (to be varnished or oiled)

**Dimensions :**

3050 x 1250 mm (all species)

2520 x 1250 mm (not available in reconstituted veneers)

**Thickness :** 0,6 mm

**Bending :** Cold bending radius : 40 mm

**Fire rating :** Without